



Jdbltech

Jdbltech

Company Profile

Founded in 2014, the head office Jdbl Technology Hong Kong is an advanced scientific and technological enterprise specialized in R&D ,production of garment machine including automatic down and fiber filling machine ,automatic fabric spreader and cutter . Also We have been one of the biggest other special garment machine wholesaler in southeast of China via cooperating famous ranking number 1 domestic equipment manufacturer. Our China manufacture Suzhou Jdbltech Automation Equipment Co.,Ltd. is in charge of producing and provide exporting service which is located in Suzhou city only 80-100 kilometers away from Shanghai and Ningbo port.

All of our products comply with international quality standards and are greatly appreciated in a variety of different markets throughout the world including Korea, Japan, Vietnam, Russia, Canada, Armenia, Lebanon,UAE,Saudi,Romania,Czech,USA,Pakistan, India, Bangladesh, Morocco,Moldova, South Africa and so on.

We not only sell our own brand jdbltech,newly but also supply OEM service for the customers from different countries. Meanwhile, we have more skilled technicians people to supply online installation and maintenance service as well as visiting destination customer country to provide face to face training job to make client satisfied from beginning to the end.

If you are interested in any of our products or would like to discuss investment, please feel free to contact us. We are always desiring comfortable business relationships with clients around the world no matter when ,where and who.

苏州捷博泰克自动化设备有限公司

SUZHOU JDBLTECH AUTOMATION EQUIPMENT CO.,LTD.

Tel:+86 512 51928823

Email: info@jdbltech.com

Web: www.jdbltech.com

Add : No. 58-1, Haiyubei Road , Changshu City,
Jiangsu Province,China





Jdbltech

Jdbltech



D-8002S自动裁剪机 D-8002S automatic cutting machine

便宜·好用

ECONOMICAL AND PRACTICAL

品质一坚若磐石 价格一普惠大众

QUALITY - ROCK SOLID PRICE - UNIVERSALLY FAVORABLE PEOPLE

CUTTING, ROME, 裁剪房专业解决方案

CUTTING, ROME, PROFESSIONAL SOLUTION FOR CUTTING ROOM



D-8002S 系列主要参数

Jdbltech

D-8002S Series Main Parameters

Jdbltech

D8002S系列参数

| | | |
|----------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| Machine type 机器型号 | | D8002S |
| Feature 特点 | Name型式 | JDBLTECH |
| | Cutting width裁切宽度 | 2030 mm |
| | Cutting length裁切长度 | 2500 mm |
| | Maximum Cutting height 最大裁切高度 | 80mm/110mm |
| Cutting specification 裁切规格 | Method裁切方式 | Straight knife reciprocating clipping |
| | Knives刀片 | 自动磨刀, 刀宽8mm, 厚度2.0 2.5mm Automatic sharpening, Knife width 8mm,Thickness 2.0,2.5mm |
| | Speed速度 | 最高速度90m/min 加速度1G Maximum speed 90m/min acceleration 1G |
| | Positioning accuracy 定位精度 | < 0.1mm |
| Machine specification 机器规格 | Outside dimensions of machine 机器外尺寸 | Length,width and height 5500*2900*1500mm |
| | Conveyor area 输送带规格 | Length and width 2200*2130mm |
| | Vacuum method吸附方式 | 分离式变频吸附 Separate frequency conversion adsorption |
| System specification 系统规格 | Operate the computer 操作电脑 | 电脑, 台式电脑 PC, Desktop computer |
| | language语言 | 中文, 英文 Chinese, English |
| | Power电力需求 | 三相 380V,22KW Three phase 380V, 22KW |
| Others 其他 | Compressed air抽气压力 | '-20KP |
| | Standard color机台颜色 | 白色 White |
| | Weight重量 | 3000KG |
| | Standard configuration 标准配置 | 自动换床, 主轴一级传送, 自动磨刀 Automatic bed change, Spindle first-level transmission ,Automatic knife sharpening |
| | Optional device 选配 | 打孔装置 机器移动 悬浮刀 冷却装置 安全装置 空调系统 Punching device, Machine movement, Floating knife, Cooling device, Safety device, Air conditioning system |

ECONOMICAL AND PRACTICAL

便宜 · 好用



核心部件合作品牌

CORE COMPONENT COOPERATIVE BRAND



技术特点

TECHNICAL CHARACTERISTICS

- 1、裁剪速度快，行业领先，优势明显。
 - 2、性价比高，使用费用低。
 - 3、操作简单，2小时包教包会。
 - 4、智能系统，每一步操作都给您精准提示。
 - 5、软硬件配置高端，系统稳定，维护简单。
1. The cutting speed is fast, the industry is leading, and the advantages are obvious.
 2. High cost performance and low usage cost.
 3. The operation is simple, and it can be learned within 2 hours of teaching.
 4. Intelligent system, every step of the operation will give you precise tips.
 5. High-end hardware and software configuration, stable system and simple maintenance.

 **多** 裁切层数多
More, more cutting layers

 **快** 裁切速度快
Fast, fast cutting speed

 **好** 裁切精度高
Good, high cutting precision

 **省** 省面料 使用费用低
Save, save fabric, low cost

便宜 · 好用


ECONOMICAL AND PRACTICAL



Jdbltech

Jdbltech

各类软性硬性材料均能完美切割
ALL SOFT AND HARD MATERIALS CAN BE CUT PERFECTLY

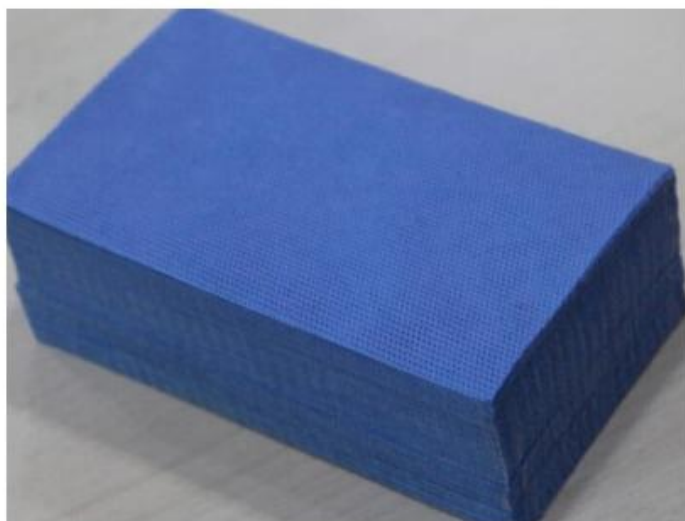

高速裁剪专家 HIGH-SPEED CUTTING EXPERT

适用行业 APPLICABLE INDUSTRY



针织服装
KNITTED APPAREL



家居服装
HOME CLOTHING



牛仔
DENIM



军工用品
MILITARY CLOTHES



运动服装
SPORTSWEAR



Jdbltech

Jdbltech

便宜 · 好用

ECONOMICAL AND PRACTICAL



自动铺布机 KW-190/210

Automatic Spreading Machine KW-190/210

| 机 型 Models | KW-190 | KW-210 |
|-----------------------------|-------------------------------------------------------|-----------------------------------------|
| Voltage 电 压 | 1P/220V | 1P/220V |
| Motor power 马达功率 | 1KW | 1KW |
| Spreading width 拉布宽度 | 1900mm.75" | 2100mm.83" |
| Cutting table width 裁台宽度 | 2130mm.84" | 2330mm.92" |
| Cloth Weight 布料重量 | 80kgs max | 80kgs max |
| Cloth diameter 布料直径 | 550mm max | 550mm max |
| Working speed 行走速度 | 90m/min max | 90 m/min max |
| Machine size 机器尺寸 | 2600*1800*950 | 2800*1800*950 |
| Packing size 装箱尺寸 | 2800*2000*1250 | 3000*2000*1250 |
| weight / gross weight 净重/毛重 | 570/860kg | 610/970kg |
| Spreading heigh 拉布高度 | 标准型单拉 One way 220mm,加高 Max300mm | 标准型双拉 Face to Face 150mm,加高 Max230mm |
| Spreading way 拉布方式 | 单向拉布/双向拉布/多段式长短拉布 One way/Face to Face/Multi-scale | |

品质一坚若磐石 价格一普惠大众

QUALITY - ROCK SOLID PRICE - UNIVERSALLY FAVORABLE PEOPLE



Jdbltech

Jdbltech

苏州捷博泰克自动化设备有限公司

SUZHOU JDBLTECH AUTOMATION EQUIPMENT CO.,LTD.

Tel: +86 512 51928823

Email: info@jdbltech.com

Web: www.jdbltech.com

Add : No. 58-1, Haiyubei Road , Changshu City, Jiangsu Province, China



主要装置:

- 液晶触控装置
- 自动感应送料装置
- 自动对边装置
- 紧急停止装置
- 自动上升装置
- 灯箱照明装置

Main Device:

- Touch panel display
- Fabric loading sensor
- Edge control device
- Automatic lifting device

选用配备:

- 90度转折痕装置
- 轨道式载人站台
- 安全防撞红外线装置

Optional:

- 1/4 Turn Device
- Riding Platform with Track
- Safty Sensor Device

优点:

- PLC触控屏幕作业系统
- 单人操作, 大大提升传统人力拉布效率
- 无布停机, 自动驶回定点
- 五分钟自动关机
- 紧急停止时, 下放布料不会拉拖
- 简化操作, 提高生产效率, 确保品质
- 可加装人工站台及站台轨道与机器一体, 从而不影响机器行走速度

Feature:

- PLC Touch Panel, user-friendly operation system.
- The streamline shape can reduce the wind disturbance noise and vibration.
- Machine returns back to original position once fabric runs empty.
- The machine power will automatically shut off up 5 minutes idle.
- The spread and laid fabric is not pulled when the emergency stop triggers.
- Simple operation increases production efficiency and also ensures the best quality.
- The platform combined with machine. So it won't affect the speed of the machine.

规格 Specification

| 型号 Model | Y5-100 | Y5-120 |
|-------------------------------|---------------------------------------------------|---------------------|
| 电压 Power Supply | 1P/220V | |
| 马达功率 Motor | 600W | |
| 拉布宽度 Maximum Cloth Width | 330-1000mm/(13-39") | 330-1200mm/(13-47") |
| 裁台宽度 Table Width | 1240mm | 1440mm |
| 布料重量 Weight of cloth roll | 85kg max | |
| 行走速度 Travel Speed | 90m/min max | |
| 机器尺寸 L*W*H Dimensions(mm) | 1660*1440*1200 | 1860*1400*1200 |
| 装箱尺寸 L*W*H Packing Volume(mm) | 1960*1600*1400 | 2100*1600*1400 |
| 净重/毛重 N.W/G.W | 220/370kg | 240/380kg |
| 拉布高度 Lay Height | 220mm | |
| 标准布架 Standard Width | 26" 32" 38" 44" (可定制 Available For Customization) | |
| 布型 Material Forms | 匹布模式 Fold Fabrics | |
| 传动轨道 Gear Track | 12" Sections (需要的 Required) | |
| 拉布方式 Spreading Methods | 双向拉布 Zigzag Spreading (Face To Face) | |

*产品规格和内容, 如有更改, 恕不另行通知 *Design and specifications subject to change without prior notice

便宜 · 好用


ECONOMICAL AND PRACTICAL



JdbLtech

JdbLtech

外形尺寸平面图 Machine Size Layout Drawing

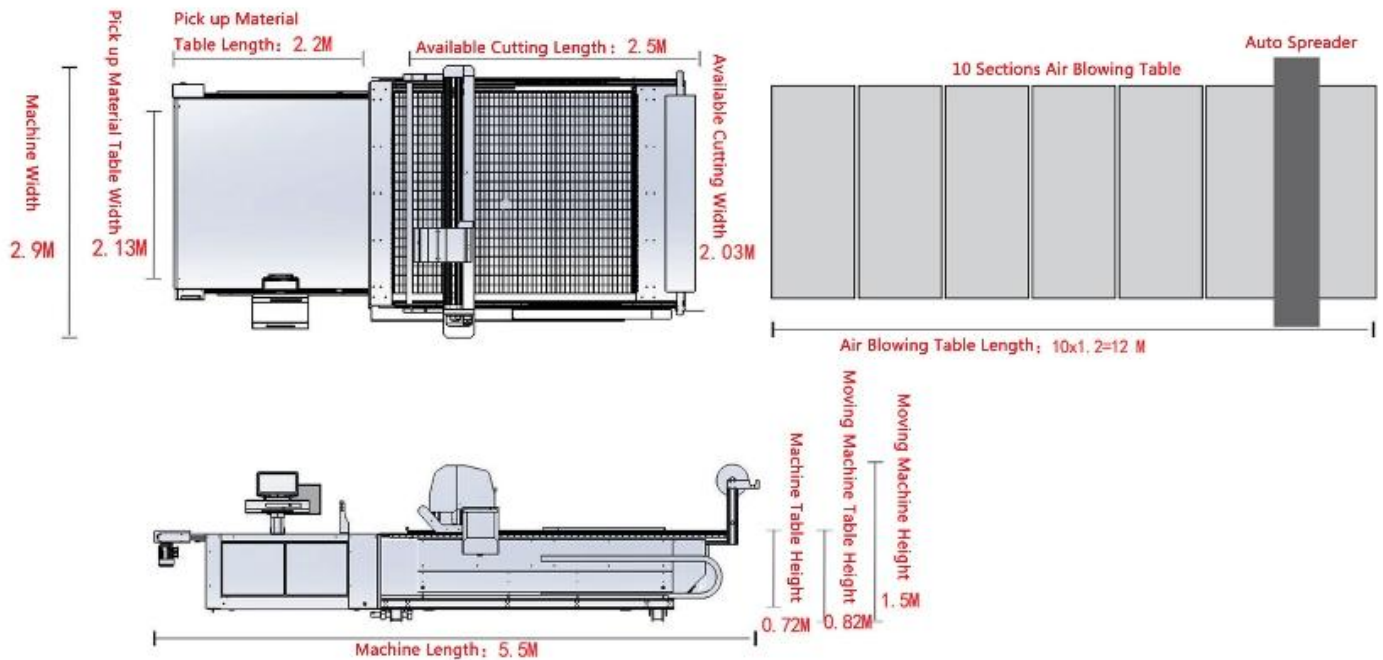

全球领先的连续送料裁剪系统-自动换床系统

The world's leading continuous feeding cutting system - automatic bed changing system

我公司研发的所有智能裁床，相比传统自动裁床，可有效提高30%工作效率，高速裁剪过程中采用连续不间断送料，不停机等待物料过窗，可实现同步裁剪同步送料，高精度无差别裁剪，有效减少工厂用工成本、物料成本，是企业首选的一款高速高精全自动智能裁床。

All the intelligent cutting machines developed by our company, compared with the traditional automatic cutting machines, can automatically change the bed with one key after high-speed cutting is completed. It can effectively reduce the labor cost and material cost of the factory, and effectively improve the work efficiency by 30%. It is a high-speed, high-precision automatic intelligent cutting machine preferred by enterprises.

价值 · 诚信 · 担当

VALUE, INTEGRITY, RESPONSIBILITY

最专业严谨的技术支持，全方位一体化服务，为您的成功保驾护航

THE MOST PROFESSIONAL AND RIGOROUS TECHNICAL SUPPORT, ALL-ROUND INTEGRATED SERVICES, ESCORT YOUR SUCCESS



全自动羽绒纤维填充机

Automatic Down And Fiber Filling Machine

Jdbltech

Jdbltech



Mesh Nozzle



HD Operation Screen



Acrylic Hopper



High Precision Weighing Sensor



Down Returning System



Humidity Control System

| | | | | |
|-----------------------------------------------------------------|---------------------------------|---------------------------------|---------------------------------|---------------------------------|
| 产品图 Image | | | | |
| 型号 Model | JD-2T-8C | JD-2T-12C | JD-4T-16C | JD-4T |
| 应用 Scope | Down Jackets/Polyester Cloths | Down Jackets/Polyester Cloths | Down Jackets/Polyester Cloths | Down Jackets/Polyester Cloths |
| 主机箱尺寸 Feeding Unit Size | 2350*900*1900mm | 2350*900*1900mm | 2350*900*1900mm | 1600*2850*2000mm |
| 称重箱尺寸 Weighing Unit Size | 1950*600*960mm | 1950*600*960mm | 1950*600*960mm | N/A |
| 整体组装占地面积 Overall Installation Area | 2350*3500mm | 2350*6100mm | 2350*6600mm | 2850*4000mm |
| 储绒量 Filling Storage | 15kg | 15kg | 15kg | 10kg |
| 设备重量 Equipment Weight | 800kgs | 1100kgs | 1300kgs | 500kgs |
| 设备电压 Voltage | AC 220V/50HZ | AC 220V/50HZ | AC 220V/50HZ | AC 220V/50HZ |
| 额定功率 Power | 2KW | 2KW | 2KW | 2KW |
| 设备进气要求 Equipment Pressure Requirement | 0.8Mpa | 0.8Mpa | 0.8Mpa | 0.8Mpa |
| 空压机功率/排气量 Air Compressor Power(Supply By Customer) / Air Volume | 7.5KW; 0.8m ³ /Min | 7.5KW; 0.8m ³ /Min | 7.5KW; 0.8m ³ /Min | 7.5KW; 0.8m ³ /Min |
| 可充材料 Filling Material | 50-90 Down/Polyester Ball Fiber | 50-90 Down/Polyester Ball Fiber | 50-90 Down/Polyester Ball Fiber | 50-90 Down/Polyester Ball Fiber |
| 充绒口数量 Filling Nozzle Qty | 2 | 2 | 4 | 4 |
| 充绒口直径 Filling Nozzle Diameter | 16mm/19mm/25mm | 16mm/19mm/25mm | 16mm/19mm/25mm | 16mm/19mm |
| 称重循环数 Weighing Scales / Per Nozzle | 4/1 | 6/1 | 4/1 | N/A |
| 填充范围 Weighing Range | 0.2-30g | 0.2-20g | 0.2-30g | 0.1-1000g |
| 充绒速度 Filling Speed(< 3G) | 1500-2000 grids /H/Nozzel | 1800-2500 grids /H/Nozzel | 1500-2000 grids /H/Nozzel | 2000-3000 grids /H/Nozzel |
| 显示精度 (90绒标准测试) Display Accuracy | 0.01g | 0.01g | 0.01g | N/A |
| 误差范围 (90绒标准测试) Tolerance | ±3% | ±3% | ±3% | N/A |
| 裁片格子长度 Cloth Grid Length Requirement | >10cm | >10cm | >10cm | >10cm |
| 自动恒湿装置 Humidity Control System | ✓ | ✓ | ✓ | ✓ |
| 马达过载保护 Motor Overload Protection | ✓ | ✓ | ✓ | ✓ |
| U盘数据导入导出 U Disk Data Input And Download | ✓ | ✓ | ✓ | ✓ |
| 破片补充 Fragment Supplement | ✓ | ✓ | ✓ | × |
| 回绒系统 Down Returning System | ✓ | ✓ | ✓ | × |
| 透气炮筒 Mesh Nozzle | ✓ | ✓ | ✓ | × |
| 一键回绒 One Button Down Reback | ✓ | ✓ | ✓ | × |
| 一键清零 One Button Reset | ✓ | ✓ | ✓ | × |
| 桌面除尘系统 Down Recycle Clean System | ✓ | ✓ | ✓ | ✓ |
| 自动加绒系统 Automatically Loading Down System | ✓ | ✓ | ✓ | ✓ |
| 除铁装置 Iron Rust Removing System | ✓ | ✓ | ✓ | ✓ |
| 10寸高清触摸屏 10-inch HD Touchscreen | ✓ | ✓ | ✓ | ✓ |
| 独立称重系统 Independent Weighing System | ✓ | ✓ | ✓ | × |
| 多格单格填充 Multiple Grids And Single Grid Filling | ✓ | ✓ | ✓ | ✓ |

设备供气供电要求

Equipment Gas And Voltage Requirement

The gas pressure is required to supply more than 0.8m³/min air flow, and the gas supply pressure is not less than 0.8mpa. If using gas with other equipment, it is required the length of the gas pipe is within 40 meters and the pipe size is more than 1 inch, a purifier should be added to make the inlet gas free of oil and water. For independent gas supply, it is recommended to use a high pressure air pump or air compressor above 7.5KW, and configure a 1M³ gas storage tank (which will prolong the service life of the air compressor).

苏州捷博奈克自动化设备有限公司

SUZHOU JDBLTECH AUTOMATION EQUIPMENT CO.,LTD.

Tel: +86 512 51928823

Email: info@jdbltech.com

Web: www.jdbltech.com

Add: No. 58-1, Haiyubei Road, Changshu City, Jiangsu Province, China



Whatsapp



Wechat



Website